

Civik / technical data sheet

Civik staircases are characterized by a landing which allows the staircases to be fitted to openings of any shape or size.
Civik has an adjustable height of between 252 and 305 cm.

STEEL COLOURS

GREY,
WHITE OR BLACK



Table 1


			SUPPLEMENTARY ITEMS		
	STAIRCASE HEIGHT IN CM	RISES	TREADS	POLES	HANDRAILS
INCREASE	from 336 to 376	16	+ 3	+ 1	+ 1
	from 315 to 352	15	+ 2	+ 2*	+ 1
	from 294 to 329	14	+ 1	-	-
STANDARD	from 273 to 305	13	12 TREADS + 1 UNIVERSAL LANDING + RAILING WITH VERTICAL BALUSTERS		
DECREASE	from 252 to 282	12	-	-	-
	from 231 to 258	11	-	+ 1*	-
	from 210 to 235	10	-	+ 1*	-




RISE ADJUSTABLE FROM 21 TO 23.5 CM

* REPLACES THE EXISTING 125 CM POLE IN THE CIVIK STAIRCASE


ø 120 cm



ø 140 cm




ø 160 cm



DIAMETERS

The diameters of the staircase are 120, 140 and 160 cm.
The recommended opening in the floor is at least 5 cm larger than the diameter of the staircase.
Example: Ø staircase 120 cm = Ø opening 125 cm.

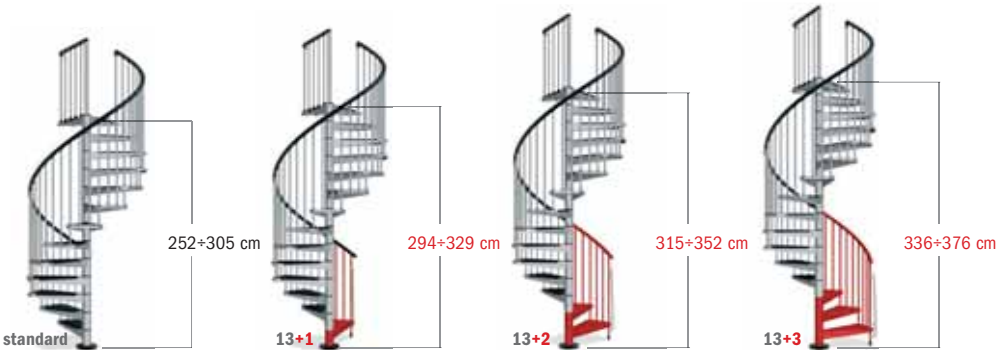

SUPPLEMENTARY ITEMS OVERVIEW

					
TREAD	RISER	POLE (82 CM)	HANDRAIL (120 CM)	BALUSTRADE (120 CM)	CHILD PROTECTION GATE

TYPES OF OPENINGS AND BALUSTRADES

no opening

fig. 1



round opening

fig. 2



square opening

fig. 3



ROTATION

The direction of rotation, whether clockwise or anti-clockwise, can be decided during installation.



clockwise



anti-clockwise

SUPPLEMENTARY BALUSTRADE

It is necessary to protect the upper floor aperture (fig. 1, 2, 3).

It comes in 120 cm modules comprising 10 balusters, handrail and fixings.

The balustrade can also assume a circular shape (fig. 2).

SUPPLEMENTARY TREADS / POLES / HANDRAILS

To reach a staircase height of 376 cm, you must purchase one or more supplementary treads comprising the structure, tread and balusters.

Supplementary pole and handrail modules (Table 1) must be purchased for certain configurations.

RISER BAR

Allows to reduce the space between treads to prevent children from falling.



CHILD PROTECTION GATE

Kalypto is a safety accessory to prevent children under the age of 24 months from climbing up and down the stairs on their own. It is made up of a sheet stretched over a rigid tubular frame and plastic joints to fasten the gate to the railing. It is 82 cm long and 73.5 cm high and can be shortened down to 54 cm to adapt to the staircase dimensions.

Suitable for indoor use.

EXAMPLE

If you wish to purchase CIVIK comprising $13 + 3 = 16$ rises (see adjacent drawing), the following items are needed:

- 1 CIVIK STAIRCASE (standard)
- 3 SUPPLEMENTARY TREADS
- 1 SUPPLEMENTARY POLE (82 cm)
- 1 SUPPLEMENTARY HANDRAIL



FOR FURTHER INFORMATION
VISIT THE WEBSITE
www.fontanotstaircases.co.uk

fontanot
arte